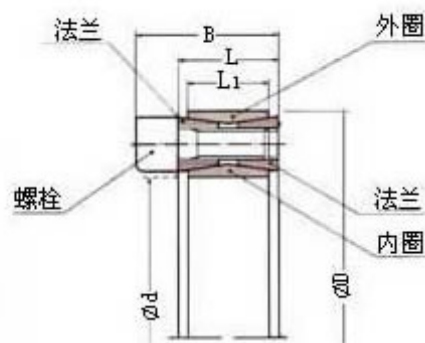


单位 (mm)

SWLE200	主要尺寸			轴向载荷		表面压力		夹紧螺栓			重量 (g)
d × D	L	L ₁	B	扭矩M _t (kgf-m)	轴向载荷 P _{ax} (kgf)	轴 kgf/mm ²	轮 kgf/mm ²	孔 数	螺纹	扭矩 (kgf-m)	
20 × 47	20	17	26	27	2760	27	11	8	M6	1.4	208
22 × 47	20	17	26	30	2760	24.5	11.5	8	M6	1.4	198
24 × 50	20	17	26	37	3110	25	12	9	M6	1.4	216
25 × 50	20	17	26	39	3110	24	12	9	M6	1.4	210
28 × 55	20	17	26	48	3450	24	12	10	M6	1.4	256
30 × 55	20	17	26	52	3460	22.5	12.5	10	M6	1.4	244
32 × 60	20	17	26	66	4150	25	13.5	12	M6	1.4	294
35 × 60	20	17	26	72	4150	23	13.5	12	M6	1.4	276
38 × 65	20	17	26	91	4840	25	14.5	14	M6	1.4	320
40 × 65	20	17	26	96	4840	23.5	14.5	14	M6	1.4	308
42 × 75	24	20	22	158	7520	30	17	12	M8	3.4	556
45 × 75	24	20	22	170	7520	28	17	12	M8	3.4	522
48 × 80	24	20	22	181	7520	26	15.5	12	M8	3.4	578
50 × 80	24	20	22	190	7520	25	15.5	12	M8	3.4	564
55 × 85	24	20	22	242	8800	26.5	17	14	M8	3.4	610
60 × 90	24	20	22	264	8800	24.5	16	14	M8	3.4	644
65 × 95	24	20	22	327	10000	26	17.5	16	M8	3.4	690
70 × 110	28	24	28	480	13600	27	17	14	M10	6.6	1214
75 × 115	28	24	28	510	13600	25	16.5	14	M10	6.6	1280
80 × 120	28	24	28	540	13600	24	16	14	M10	6.6	1346
85 × 125	28	24	28	660	15600	25.5	17.5	16	M10	6.6	1424
90 × 130	28	24	28	700	15600	24	16.5	16	M10	6.6	1472
95 × 135	28	24	28	830	17600	25.5	18	18	M10	6.6	1546
100 × 145	33	26	45	990	19800	25.5	17.5	14	M12	11.5	2132
110 × 155	33	26	45	1090	19800	23	16.5	14	M12	11.5	2306
120 × 165	33	26	45	1360	22700	24	17.5	16	M12	11.5	2400
130 × 180	38	34	50	1840	28400	21.5	15.5	20	M12	11.5	3500
140 × 190	38	34	50	2180	31200	22	16	22	M12	11.5	3848
150 × 200	38	34	50	2550	34000	22	16.5	24	M12	11.5	4100
160 × 210	38	34	50	2950	36900	22.5	17	26	M12	11.5	4400
170 × 225	44	38	58	3560	41900	21.5	16.5	22	M14	18	5800
180 × 235	44	38	58	4110	45700	22	17	24	M14	18	6100
190 × 250	52	46	66	5060	53300	20	15.5	28	M14	18	8300
200 × 260	52	46	66	5710	57100	20.5	16	30	M14	18	8700
220 × 285	56	50	72	7410	67400	20.5	15.5	26	M16	28	11300
240 × 305	56	50	72	9330	77800	21.5	17	30	M17	28	12200